



Canterbury Freestanding ★ ★ ★ ★

Elegant, curved appearance that effortlessly suits any home.

The double glazed window allows unobstructed viewing of the flames, creating the perfect feel of a log fire in your home.

An impressive energy rating delivers heat effectively.

Can be safely placed on all floor surfaces making it suitable for the family rooms and large living areas of modern Australian homes.

Standard Features

- + Electronic ignition and controls
- + 3 heat and fan speed settings
- + Realistic eucalypt look logs
- + Standard double glazed glass
- + Enhanced flame effect
- + Metallic Black Finish
- + Flue kit (FLUERO-B) required (purchase separately)
- + Heats 80 m² on average
- + 4 star energy rating
- + 4 continuously monitored safety systems

Options

- + Remote thermostat
- + Canterbury mesh guard kit



CANTFS-SDEEB

Canterbury Freestanding heater specifications and dimensions

Models

CANTFS-SDEEB

Type	Freestanding / top flue
Colours	Metallic black baked enamel finish
Gas consumption	26 MJ/hr
Gas type	Natural gas/LPG
Efficiency rating	4 stars ¹
Heat output	5.55 kW / 19.98 MJ/h
Heats on average	80 square metres (80 m ²)
Fan/heat settings	3 speed / 3 heat

Dimensions

Fascia

Height	723 mm
Width	650 mm
Depth	425 mm Min. distance from flue centre to wall at rear of heater: Round – 75 mm.

Installation

The purpose of these pages is to briefly illustrate the specifications. For full details refer to the comprehensive instructions included with the heater or visit www.cannonheaters.com.au. Whilst every effort is made to provide current information at the time this brochure was produced, continuing product development means that the enclosed specifications, images and literature may differ.

Gas connection via a ½" copper compression fitting.

A 10 amp socket within 1.5 m is required.




¹Tested to AS 4553:2008.

Flue kit comprising (purchase separately):

- 3 x 870 mm lengths of 125 mm dia. painted flue,
- 1 x 870 mm length of 125 mm dia. plain flue,
- 1 x ceiling ring,
- 1 x 125 mm cowl,
- 1 x painted bottom flue spigot.

Maximum length of flue: 4.5m

Heater does not require non-combustible base. Can be installed against a combustible wall with clearances of 40 mm rear, 100 mm side and 900 mm in front of heater. This model is to be installed with a Round Flue Kit part No. FLUERO-B purchased separately.

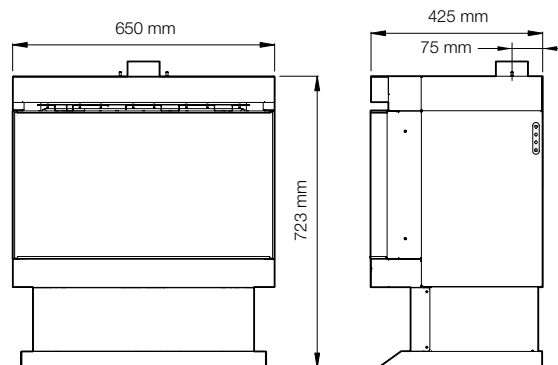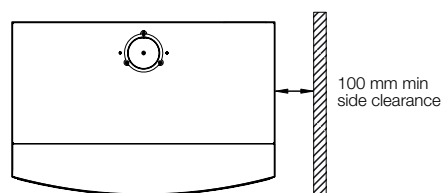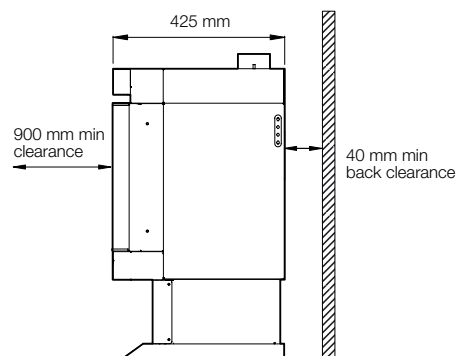

CRADLE MOUNTAIN FIREPLACES

T +61 3 6362 0922 F +61 3 6362 0999

sales@cradlemountainfireplaces.com.au

www.cradlemountainfireplaces.com.au