

# Heatseeker

600

700

850

1000

Heating on a grand scale



Celebrating  
**30**  
Years

**real flame**  
the hearth of australia

Leaders in  
Gas Fireplace  
Technology



## Heating on a grand scale

Create the warmth and atmosphere of an open fire with the convenience and cleanliness of gas. The Heatseeker delivers optimum radiant and fan assisted convected heat. Offering total design flexibility ranging from old world to traditional or contemporary finishes.

The Heatseeker fire is available in four convenient sizes that are ideal for new or existing fireplace applications.

600

700

850

1000




Celebrating  
**30**  
Years

- 🔥 Conceived, designed, researched, developed and built in Australia
- 🔥 Convected plus radiant heat up to 45m<sup>2</sup>
- 🔥 Conventional or Power flue
- 🔥 Pebbles or Coals and Logs
- 🔥 New or existing applications
- 🔥 Old world, traditional or contemporary
- 🔥 Natural gas or LPG




# Specifications & Construction

## New Construction

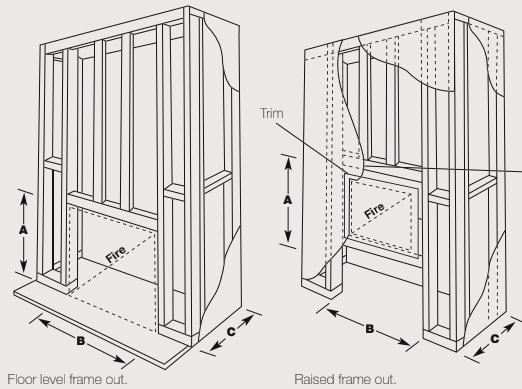


NOTE:  
Install unit and  
flue prior to  
plastering.

NOTE:  
Plaster to run  
beyond studs  
and behind trim  
or square edge.

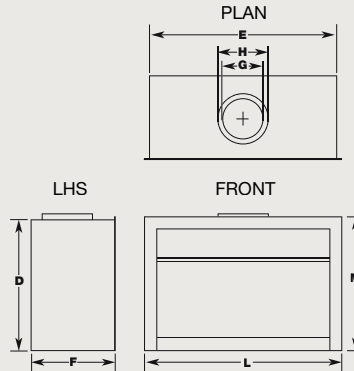

## Clearance to Combustibles




	A	B	C	D	E	F	G	H	I	J	K	L	M	NG Mj/h	LP Mj/h	GPO REQ'D	VENTILATION
600	750	750	450	650	675	415	150	200	25	100	25	740	670	37	31	YES	18000mm <sup>2</sup>
700	750	850	450	650	775	415	150	200	25	100	25	840	670	37	31	YES	18000mm <sup>2</sup>
850	750	1000	450	650	930	415	200	250	25	100	25	990	670	39	36	YES	32000mm <sup>2</sup>
1000	750	1150	450	650	1075	415	200	250	25	100	25	1140	670	39	36	YES	32000mm <sup>2</sup>

Also available in inbuilt configuration for working masonry fireplaces.

Refer to TRIMS section for 4 sided trim dimensions

## Existing Fireplaces

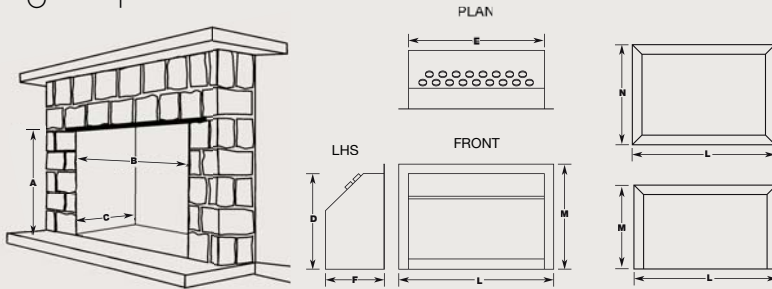

## Trims

TRIMS	L	M	N
600	790	670	800
700	890	670	800
850	1040	670	800
1000	1140	670	800

INBUILT	Minimum			D	E	F	NG Mj/h	LP Mj/h	GPO REQ'D	VENTILATION
	A	B	C							
600	610	620	380	605	610	370	37	31	YES	40000mm <sup>2</sup>
700	610	720	380	605	710	370	37	31	YES	40000mm <sup>2</sup>
850	610	870	380	605	860	370	39	36	YES	40000mm <sup>2</sup>
1000	610	1020	380	605	1005	370	39	36	YES	40000mm <sup>2</sup>

**Warranty:** Provided your Real Flame Gas Fire is installed by a licensed Gas Fitter in accordance with our Installation Instructions and operated in accordance with our Operating Manual, your Firebox is warranted for ten years and all other parts for one year from date of purchase. Refer to our website or our Installation and Operating Manual for a comprehensive warranty.



## CRADLE MOUNTAIN FIREPLACES

T +61 3 6362 0922 F +61 3 6362 0999

sales@cradlemountainfireplaces.com.au

www.cradlemountainfireplaces.com.au



Leaders in  
Gas Fireplace  
Technology